

CH-LCD201AV 20" TFT LCD VIDEO Monitor






Features:

- ☐ Suitable for all kinds of advertisement.
- ☐ 20-inch LCD-TV Level
- ☐ High Performance
- ☐ High Brightness of 500cd/m
- ☐ High Contrast at 500 : 1
- ☐ Fast Response Time of 16ms
- ☐ Best Viewing Angle
- ☐ NTSC / PAL / SECAM Auto Detect
- ☐ Multiplexer Video Input / Output Interface
- ☐ Easy OSD Menu User Interface
- ☐ 3D De-interlace
- ☐ 3D Comb filter
- ☐ VESA Standard Bracket

Specification

Model	CH-LCD201AV
LCD PANEL	20" TFT LCD Monitor For Multi Media Advertisement
Front Control	Power ON/OFF ; OSD Control Function
Display Resolution	800 x 600 ; 640 x 480 (PC)
Active Area (mm)	480 x 306mm
LCD Profile Ratio	TN Mode , Normally White
LCD Panel Type	0.51 x 0.51mm
Dot Pitch (mm)	4 : 3
Display Colors	16.7M (8 bit for R,G,B)
Brightness	500cd/m ² typ.
Contrast Ratio	480 : 1 typ.
Viewing Angle	L/R : 80° ; U/D : 80°
Response Time	16ms
Input Impedance	90~260V AC 60Hz / 50Hz
Input Signal	0.5 to 2.0 Vp-p composite video
In/Output Impedance	75 ohms
Output Signal	1.0 Vp-p composite video

Operation System	NTSC : 525 TV Lines ; PAL : 625 TV Lines
VGA input	15 pin D-SUB connector
Video input/output	2CH BNC x 2
Audio input/output	2CH RAC x 2
Power Consumption	55W
Y/C input/output	4-pin DIN connector x 1
Dimension/Weight	490.5mm(W)x388.5(L)x66.8(H)/7Kg
Bracket	VESA 100 Standard
Operation Temperature	-10℃ ~ 60℃ (14°F ~ 122°F)
Certifications	UL 、 CE 、 FCC 、 BSMI 、 C-Tick

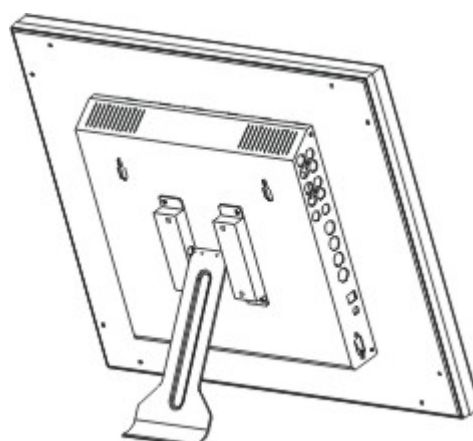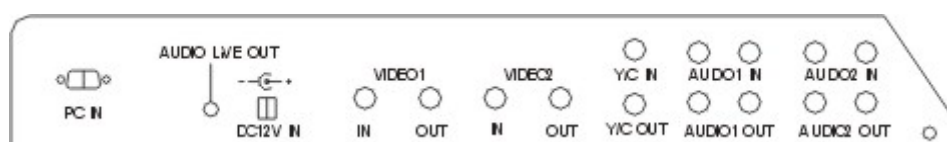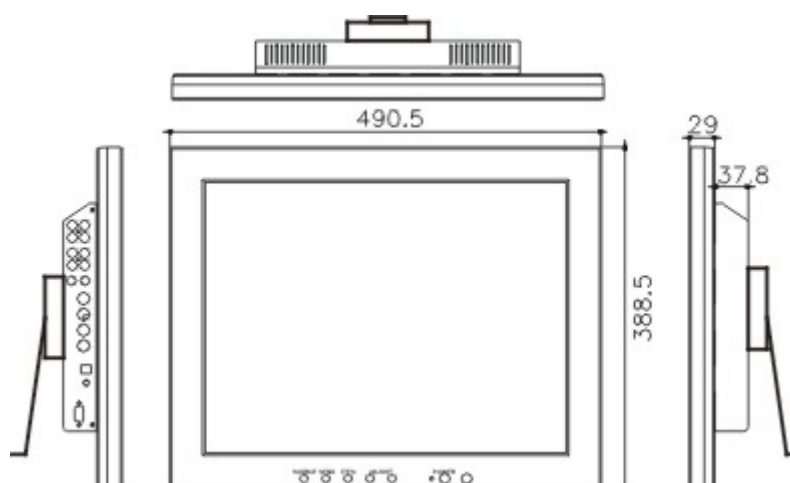



[Option\(CH-LCD-I01\)](#)